

Antriebskopf LF6C, Profilnut 10, Aluminium eloxiert - Bosch Rexroth 3842526416

Item no. BRR-3842526416

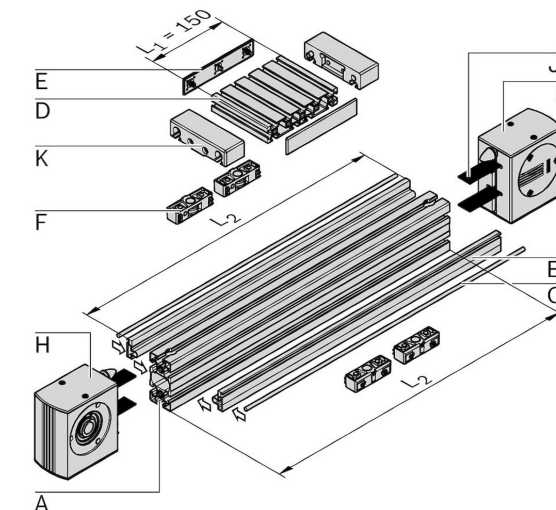
Manufacturer Bosch Rexroth

Drive head for the LF6C belt conveyor that transfers the drive torque to the toothed belt. Suitable for direct motor mounting or, with a center shaft, for a hollow shaft gear or coupling. Mounts directly on profile 45x90L via a longitudinal end connector.

TECHNICAL DATA

Country of Manufacture **Germany**

Weight **2.3 kg**

Zolltarifnummer **84313900**


19729

STANDARDS & COMPLIANCE

ESD safe ISO7380 ISO4035

DESCRIPTION

The LF6C drive head transfers the drive torque to the toothed belt of an LF6C belt conveyor. It is suitable for direct mounting of a motor or - in conjunction with a center shaft - for mounting a hollow shaft gear or a coupling.

It mounts directly on profile 45x90L using a longitudinal end connector; the profile is prepared with LF blind hole drilling for the connector. The fastening material is included in the scope of delivery.

- Drive head in anodized aluminum, hollow shaft in galvanized steel
- Cover caps in PA, black
- For profile slot 10

TECHNICAL DATA

Profile slot **10**

Profile **45x90L**

Drive head material **Aluminum, anodized**

Hollow shaft material **Steel, galvanized**

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Cover cap material	PA, black
Fastening material	2x flattened round head screw ISO7380-M8x40, 2x bolt D17x18.2-M8, 3x bolt D17x18.2-M8, 2x cover cap D17x44.6 ESD, 1x spring element D20x24x19-M8, 1x hexagon nut ISO4035-M8-04
Scope of delivery	incl. fastening material FS, caps
Packaging unit	1
Weight	2.3 kg