

Strebenprofil 40x40L 1N, Nut 10, ESD, Aluminium eloxiert - Bosch Rexroth 3842529361

Item no. BRR-3842529361

Manufacturer Bosch Rexroth

Self-supporting strut profile 40x40L 1N in anodized aluminum with profile slot 10 and ESD properties. A core building element for frames, machine bases and workstation systems in the Bosch Rexroth assembly system. Supplied as a packaging unit of 20 profiles in standard length 6070 mm.

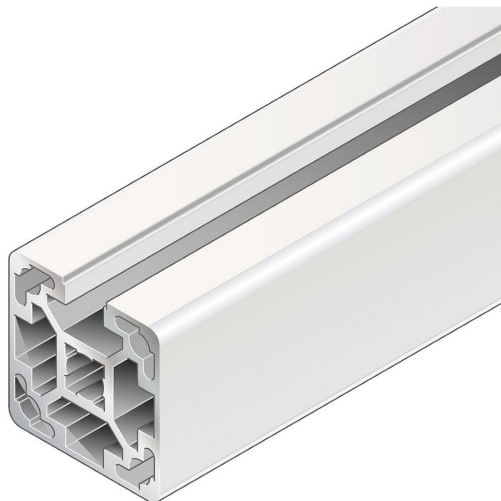
TECHNICAL DATA

Country of Manufacture **Germany**

Hinweis **Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.**

Length **6070 mm**

Weight **220 kg**

Zolltarifnummer **76042100**


31395

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Bosch Rexroth strut profile 40x40L 1N is a self-supporting building element made of anodized aluminum for constructing frames, machine bases, guards and workstation systems. With profile slot 10 and a 40 mm modular dimension it combines flexibly with the accessories of the assembly system. Its ESD properties make it suitable for electrostatically protected areas.

- Self-supporting aluminum profile, anodized, natural finish
- Profile slot 10, one open slot, 40 mm modular dimension
- ESD-capable for electrostatically sensitive areas
- Supplied as a packaging unit: 20 profiles in standard length 6070 mm

TECHNICAL DATA

Cross-section **40x40L 1N**

Profile type **1N**

Dimensions **40x40**

Modular dimension **40 mm**

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Profile slot	10
Open slots	1
ESD	yes
Color	Natural
Material	Aluminum, anodized
Length [L]	6070 mm
Mass [m]	1.7 kg/m
Profile surface [A]	6.1 cm ²
Area moment of inertia in x-direction [Ix]	9.8 cm ⁴
Area moment of inertia in y-direction [Iy]	10.3 cm ⁴
Moment of resistance in x-direction [Wx]	4.7 cm ³
Moment of resistance in y-direction [Wy]	5.1 cm ³
Torsional moment of inertia [It]	6.9 cm ⁴
Moment of torsion resistance [Wt]	3.7 cm ³
Condition on delivery	Packaging unit in standard length
Delivery unit	20
Weight	220 kg
Recommended accessories	Cover cap 40x40