

Strebenprofil 40x40L 2N, Nut 10, ESD, Aluminium eloxiert - Bosch Rexroth 3842529363

Item no. BRR-3842529363

Manufacturer Bosch Rexroth

Strut profile 40x40L 2N in anodized aluminum with a 40 mm modular grid and profile slot 10. ESD suitable and supplied in the 6070 mm standard length. A base element for frames, guards and fixtures in assembly technology.

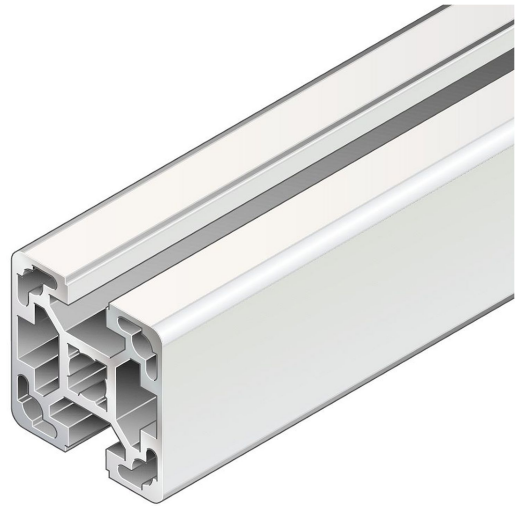
TECHNICAL DATA

Country of Manufacture **Germany**

Hinweis
Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.

Length **6070 mm**

Weight **210 kg**

Zolltarifnummer **76042100**


31396

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Bosch Rexroth 40x40L 2N strut profile is a lightweight aluminum base profile for the modular construction of frames, guards and workstations in assembly and automation technology. With a 40 mm modular grid and profile slot 10 it combines freely with connectors and accessories.

- 40 mm modular dimension and slot 10 for flexible connection technology
- ESD suitable for use in electrostatic protected areas
- Anodized aluminum, natural finish
- Standard length 6070 mm, supplied in delivery units of 20

TECHNICAL DATA

Cross-section	40x40L 2N
Profile type	2N
Dimensions	40x40
Profile slot	10
Open slots	2

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Modular dimension	40 mm
ESD	yes
Color	Natural
Material	Aluminum, anodized
Length [L]	6070 mm
Profile surface [A]	6 cm ²
Area moment of inertia [Ix]	9 cm ⁴
Area moment of inertia [Iy]	10.3 cm ⁴
Moment of resistance [Wx]	4.5 cm ³
Moment of resistance [Wy]	5.2 cm ³
Torsional moment of inertia [It]	4 cm ⁴
Torsional moment of resistance [Wt]	3 cm ³
Mass [m]	1.6 kg/m
Delivery unit	20
Condition on delivery	Packaging unit in standard length
Weight	210 kg