

Schwenklager 40x80, ESD, Aluminiumdruckguss, Nut 10 - Bosch Rexroth 3842554406

Item no. BRR-3842554406

Manufacturer Bosch Rexroth

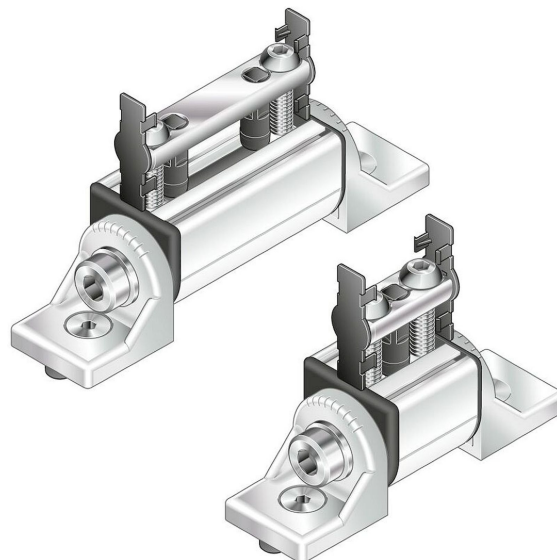
Diecast aluminum swivel bearing 40x80 for pivoting connections between slot-10 aluminum profiles. ESD-compatible and rated for a bending moment of 130 Nm. Fastening and connecting hardware are included in the scope of delivery.

TECHNICAL DATA

Ausführungsklasse **TEC**

Country of Manufacture **Germany**

Weight **0.688 kg**

Zolltarifnummer **83024900**


STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Bosch Rexroth swivel bearing 40x80 joins slot-10 aluminum profiles into a pivoting, articulated connection. It suits adjustable frames, stops and fixtures in the aluminum profile system and is approved for ESD-protected areas.

- Pivoting connection of two profiles on the 40 mm modular grid
- Diecast aluminum, rated for a bending moment of 130 Nm
- ESD-compatible for electrostatic discharge protected areas
- Supplied complete with fastening hardware, bolt connectors and cover caps

TECHNICAL DATA

Modular dimension 40 mm

Profile slot 10

Dimensions 40x80

Dimension p 80 mm

Bending moment 1 130 Nm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

ESD	yes
Material	Diecast aluminum
Material information	Swivel bearing: Diecast aluminum; Fastening material: Steel, galvanized; Cover cap: PP, gray
Fastening material	2x countersunk screw DIN7991-M8x20, 2x T-nut slot 10 M8
Scope of delivery	Incl. cover caps, bolt connectors, fastening material (FS)
Packaging unit	1
Weight	0.688 kg