

Strebenprofil 22,5x45, ESD, Nut 10, Aluminium eloxiert - Bosch Rexroth 3842537812

Item no. BRR-3842537812

Manufacturer Bosch Rexroth

ESD-capable strut profile in anodized aluminum with a 22.5x45 cross-section, profile slot 10 and 45 mm modular dimension. A base element for frames, fixtures and machine enclosures in electrostatically protected areas. Supplied as a packaging unit of 24 bars in standard length 6070 mm.

TECHNICAL DATA


Country of Manufacture **Germany**

Hinweis **Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.**

Length **6070 mm**

Weight **197 kg**

Zolltarifnummer **76042100**

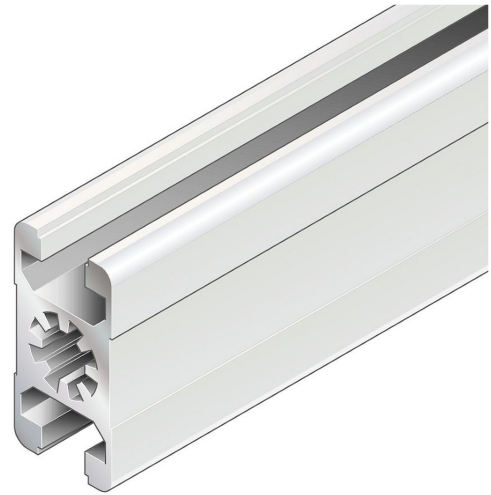

31449

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Bosch Rexroth 22.5x45 strut profile is an ESD-capable aluminum base element for building frames, fixtures and machine enclosures in assembly technology. With profile slot 10 and a 45 mm modular dimension, it integrates into the modular strut profile system.

- ESD-capable for use in electrostatically protected areas
- Aluminum, anodized, natural color
- 2 open slots (slot 10) for flexible connection technology
- Supplied as a packaging unit in standard length: 24 bars of 6070 mm each

TECHNICAL DATA

Cross-section	22.5x45
Profile slot	10
Modular dimension	45 mm
Open slots	2
Profile type	Standard

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

ESD	yes
Color	Natural
Material	Aluminum, anodized
Length [L]	6070 mm
Delivery unit	24
Condition on delivery	Packaging unit in standard length
Profile surface [A]	4.7 cm ²
Area moment of inertia in x-direction [Ix]	7.1 cm ⁴
Moment of resistance in x-direction [Wx]	3.2 cm ³
Area moment of inertia in y-direction [Iy]	2.9 cm ⁴
Moment of resistance in y-direction [Wy]	2.6 cm ³
Mass [m]	1.3 kg/m
Weight	197 kg
Recommended accessories	Cover cap 22.5x45