

## Strebenprofil 20x60, Nut 6, Aluminium eloxiert - Bosch Rexroth 3842537819

Item no. BRR-3842537819

Manufacturer Bosch Rexroth

Strut profile 20x60 in anodized aluminum with slot 6 and a 20 mm grid. Supplied as a delivery unit of 16 bars in 3000 mm standard length. A load-bearing standard profile for machine frames, safety enclosures and fixtures in aluminum profile construction.

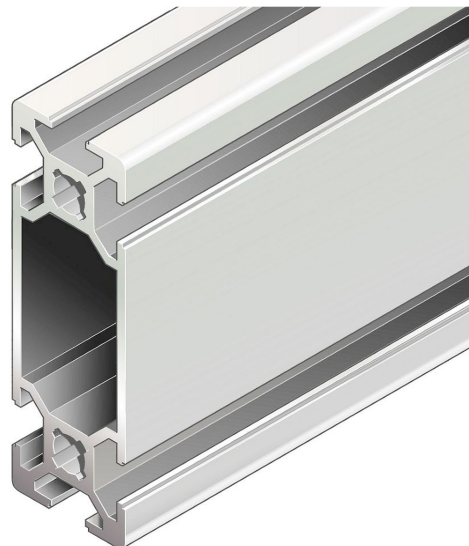
### TECHNICAL DATA

Country of Manufacture **Sweden**

Hinweis **Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.**

Length **3000 mm**

Weight **51 kg**

Zolltarifnummer **76042100**


31374

### DESCRIPTION

The Bosch Rexroth 20x60 strut profile is a load-bearing standard profile in anodized aluminum for the modular construction of machine frames, safety enclosures, workstations and fixtures. With slot 6 and a 20 mm grid it combines freely with connectors, T-nuts and other accessories of the aluminum profile system.

- Load-bearing standard profile with 6 open slots (slot 6) on a 20 mm grid
- Anodized surface in natural color, corrosion-resistant and low-maintenance
- Delivery unit of 16 bars in 3000 mm standard length
- Recommended accessory: cover cap 20x60 in signal gray or black

### TECHNICAL DATA

| Attribute         | Value              |
|-------------------|--------------------|
| Cross-section     | 20x60              |
| Profile slot      | 6                  |
| Open slots        | 6                  |
| Modular dimension | 20 mm              |
| Profile type      | Standard           |
| Material          | Aluminum, anodized |

| Attribute                         | Value                             |
|-----------------------------------|-----------------------------------|
| Color                             | Natural                           |
| Length [L]                        | 3000 mm                           |
| Delivery unit                     | 16 bars                           |
| Condition on delivery             | Packaging unit in standard length |
| Profile surface [A]               | 3.5 cm <sup>2</sup>               |
| Area moment of inertia X [Ix]     | 14.2 cm <sup>4</sup>              |
| Moment of resistance X [Wx]       | 4.7 cm <sup>3</sup>               |
| Area moment of inertia Y [Iy]     | 1.7 cm <sup>4</sup>               |
| Moment of resistance Y [Wy]       | 1.7 cm <sup>3</sup>               |
| Torsional moment of inertia [It]  | 2.3 cm <sup>4</sup>               |
| Moment of torsion resistance [Wt] | 2 cm <sup>3</sup>                 |
| Mass [m]                          | 0.9 kg/m                          |
| Weight (delivery unit)            | 51 kg                             |