

Schutzrahmen vertikal geteilt 2000x1800 mm, Wellengitter WG40, Aluminium eloxiert - Bosch Rexroth 3842554280

Item no. BRR-3842554280

Manufacturer Bosch Rexroth


Fully assembled protective fence panel (W 2000 mm x H 1800 mm) for machine guarding systems on the 45x45 grid. The vertically divided frame mounts directly onto 45x45 supports via included suspension brackets - a single installer is sufficient. The color-coated woven wire grille WG40 improves visual contrast and helps identify access routes in the guarded area.

TECHNICAL DATA

Country of Manufacture **Germany**

Weight **30 kg**

Zolltarifnummer **76101000**

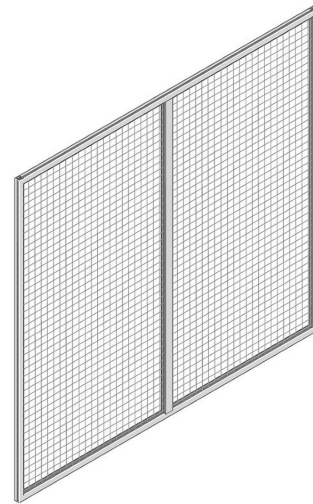

24486

DESCRIPTION

The vertically divided protective fence panel (W 2000 mm x H 1800 mm) is designed for constructing machine and plant guarding enclosures on the 45x45 modular grid. Delivered fully assembled, it is installed by a single person using the included suspension brackets to attach directly to 45x45 supports.

- Fully assembled on delivery - no frame profile assembly required on site
- Vertically divided construction provides additional stability for large surface areas
- Color-coated woven wire grille WG40 (40x40x4 mm) improves visual contrast and aids identification of access routes and emergency exits
- Compatible kits enable construction of system doors, sliding doors, and double doors
- Standard widths available; customized dimensions covered by configurable variant (Art. 3842994744)

TECHNICAL DATA

Property	Value
Width of protective frame [B]	2000 mm
Height of protective frame [HR]	1800 mm
Wire grille mesh	Woven wire grille WG40, 40x40x4 mm
Frame profile	Protective grille profile 30x30

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Property	Value
Frame material	Aluminium, anodized
Woven wire grille and fastening material	Steel, galvanized
Wire grille color (FA)	FA 0: hot-dip galvanized - FA 1: black RAL 9005 - FA 2: yellow RAL 1023
Modular dimension	45x45 supports
Scope of delivery	Protective frame incl. fastening material
Delivery condition	Fully assembled
Weight	30 kg