

Strebenprofil 45x60 D9,8 - eloxiertes Aluminiumprofil mit 4 Nuten - Bosch Rexroth 3842992376


Item no. BRR-3842992376

Manufacturer Bosch Rexroth

Anodized aluminium strut profile with a 45x60 mm cross-section and four open slots (slot width 10 mm). Modular dimension 45 mm, fully compatible with the Bosch Rexroth profile system. Supplied cut to length, 50 to 6000 mm.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.1 kg
Zolltarifnummer	76169990

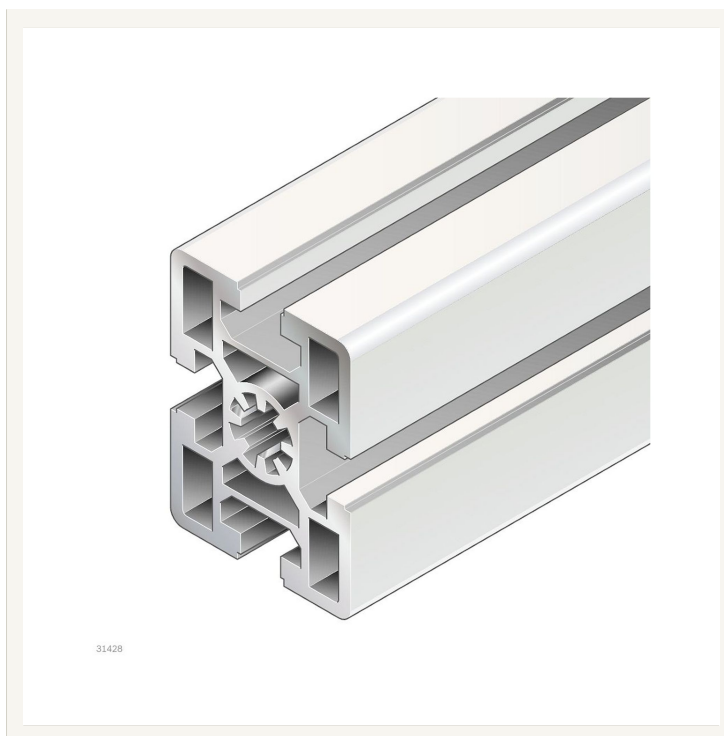

DESCRIPTION

The strut profile 45x60 D9.8 is a standard anodized aluminium profile for building assembly frames, machine bases, and guarding systems on a 45 mm grid. Four open slots (width 10 mm) allow connectors, brackets, and other system components to be positioned freely along the full length.

- Four open slots (width 10 mm) for unrestricted fitting placement along the entire profile length
- Profile adaption D9.8 and D17 in slots B/D, D9.8V and D17V in slots A/C, LF in slots A/C, F1 in slot A
- Anodized aluminium surface - corrosion-resistant and durable
- Cut to length: 50 to 6000 mm, packaging unit 1 piece
- Recommended accessories: cover caps 45x60 in black and signal gray, with and without hole

TECHNICAL DATA

Property	Value
Cross-section	45x60 mm
Modular dimension	45 mm
Profile type	Standard
Open slots	4
Slot width	10 mm
Material	Aluminium, anodized

Property	Value
Color	Natural
Length min (L min)	50 mm
Length max (L max)	6000 mm
Profile surface (A)	11 cm ²
Mass (m)	3 kg/m
Area moment of inertia X (I _x)	37.2 cm ⁴
Area moment of inertia Y (I _y)	22.7 cm ⁴
Moment of resistance X (W _x)	12.4 cm ³
Moment of resistance Y (W _y)	10.1 cm ³
Torsional moment of inertia (I _t)	6.7 cm ⁴
Moment of torsion resistance (W _t)	4.09 cm ³
Packaging unit	1 piece