

Strebenprofil 20x40x40, Aluminium eloxiert, variable Länge 50-3000 mm - Bosch Rexroth 3842992991


Item no. BRR-3842992991

Manufacturer Bosch Rexroth

Angled aluminum strut profile with 20x40x40 mm cross-section for the Bosch Rexroth profile system on a 20 mm modular grid. Eight open slots (slot size 6) allow connections in all directions. Supplied cut to length - from 50 mm to 3000 mm.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.1 kg
Zolltarifnummer	76042100

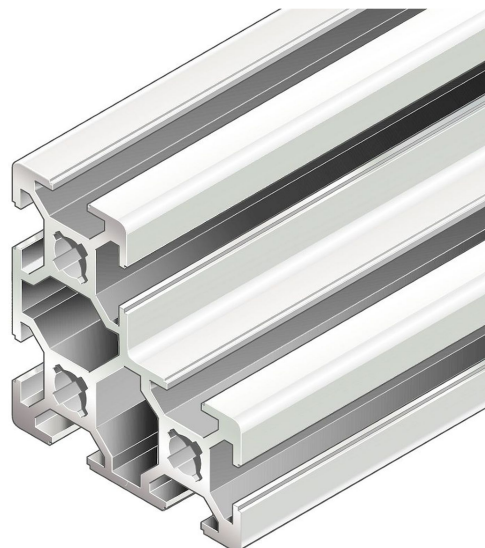

31373

DESCRIPTION

The strut profile 20x40x40 is an angled extruded aluminum profile on a 20 mm modular grid, designed for diagonal bracing and angled connections in assembly technology structures. The anodized natural-color surface, eight open slots of size 6, and full compatibility with the Bosch Rexroth profile system deliver stable, corrosion-resistant constructions that can be extended at any time. Cut to your required length from 50 mm to 3000 mm.

- Eight open slots (size 6) for maximum connection flexibility on all profile faces
- Angled profile type - purpose-built for diagonal struts and corner connections in frame assemblies
- Anodized aluminum: lightweight, corrosion-resistant and durable
- Cut-to-length supply from 50 to 3000 mm - no scrap, no rework
- Fully compatible with the Bosch Rexroth 20 mm modular profile system

TECHNICAL DATA

Property	Value
Cross-section	20x40x40 mm
Profile type	Angled
Modular dimension	20 mm
Profile slot	6
Open slots	8

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Property	Value
Length min (L min)	50 mm
Length max (L max)	3000 mm
Condition on delivery	Variable length
Color	Natural
Material	Aluminum, anodized
Profile surface (A)	4.2 cm ²
Mass (m)	1.1 kg/m
Area moment of inertia X (I _x)	6 cm ⁴
Area moment of inertia Y (I _y)	6 cm ⁴
Moment of resistance X (W _x)	2.6 cm ³
Moment of resistance Y (W _y)	2.6 cm ³
Torsional moment of inertia (I _t)	1.5 cm ⁴
Moment of torsion resistance (W _t)	1.3 cm ³
Packaging unit	1
Recommended accessories	Cover cap 20x20 signal gray, Cover cap 20x20 black