

Führungsstange LF6, variable Länge 150-3000 mm, Vollwelle VA - Bosch Rexroth 3842993967

Item no. BRR-3842993967

Manufacturer Bosch Rexroth

Bosch Rexroth guide rod for the LF6 clamping profile system, available in variable lengths from 150 to 3000 mm. The induction-hardened, polished stainless steel solid shaft is pressed into the clamping profile and guides the guide bearing with precision. Supplied individually, ungreased - lubricate per assembly instructions 3 842 527 226.


TECHNICAL DATA

Ausführungsklasse **TEC**

Country of Manufacture **Germany**

Weight **0.0099 kg**

Zolltarifnummer **84831095**

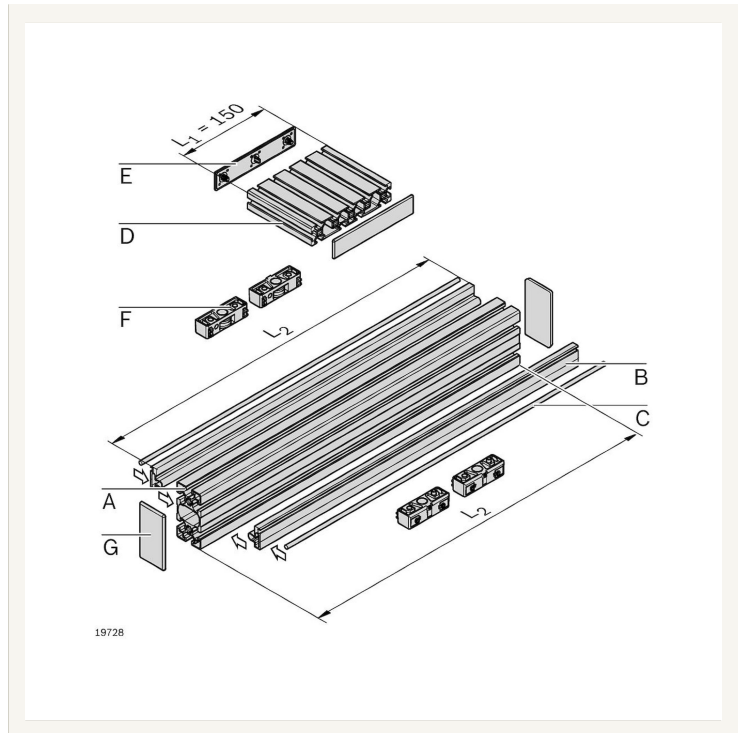

DESCRIPTION

The Bosch Rexroth LF6 guide rod is designed for variable lengths from 150 to 3000 mm, covering a wide range of assembly and handling applications in a single part number. It is pressed directly into the LF6 clamping profile, where it provides the linear guidance path for the guide bearing. The solid shaft is made from induction-hardened, polished stainless steel (VA), combining high wear resistance with corrosion resistance for demanding production environments.

- Variable length from 150 to 3000 mm - one part number covers the full length range
- Solid VA stainless steel shaft, induction hardened and polished for long service life and smooth travel
- Press-fit mounting into the LF6 clamping profile - no additional retaining elements required
- Supplied as single unit, ungreased - lubricate per assembly instructions 3 842 527 226

TECHNICAL DATA

Specification	Value
System series	LF6
Min. length (L2 min)	150 mm
Max. length (L2 max)	3000 mm
Material	Solid shaft VA, induction hardened, polished
Condition on delivery	Ungreased; lubricate per assembly instructions 3 842 527 226

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Specification		Value
Packaging unit	1 piece	
Mass	0.22 kg (reference value)	
Part number	3842993967	