

Schutzrahmen horizontal geteilt, Wellengitter WG40, B250-2500 mm - Bosch Rexroth 3842994745

Item no. BRR-3842994745

Manufacturer Bosch Rexroth

Horizontally divided protective frame made of WG40 profile 30x30 with woven wire grille 40x40x4, covering widths from 250 to 2500 mm and heights from 500 to 2300 mm. Delivered fully assembled for single-fitter mounting on 45x45 supports via suspension brackets. Available with hot-galvanized, black (RAL 9005) or yellow (RAL 1023) woven wire grille.


TECHNICAL DATA

Ausführungsklasse **TEC**

Country of Manufacture **Germany**

Weight **0.0099 kg**

Zolltarifnummer **76101000**

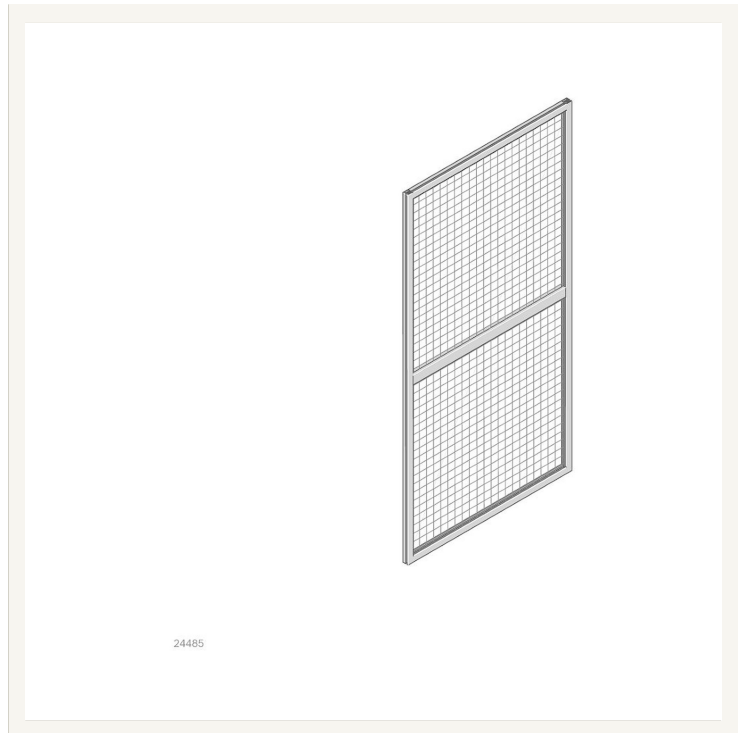

DESCRIPTION

The WG40 horizontally divided protective frame allows flexible guarding installations with widths from 250 to 2500 mm and heights from 500 to 2300 mm. Delivered fully assembled, it mounts quickly to 45x45 supports using suspension brackets - a single fitter is sufficient. Compatible kits enable integration of system doors, sliding doors and double doors within the same guarding layout.

- Custom dimensions: width 250-2500 mm, height 500-2300 mm - no on-site cutting required
- Horizontal split design provides additional rigidity for large-area installations
- Color-coded woven wire grille options (black RAL 9005 or yellow RAL 1023) improve contrast and aid identification of access points and emergency exits
- Anodized aluminum frame with hot-galvanized steel grille - corrosion-resistant and low-maintenance
- Fully assembled on delivery; modular dimension B relates to 45x45 supports

TECHNICAL DATA

Specification	Value
Type	Protective frame, horizontally divided
Grille profile	WG40, 30x30 mm
Mesh size	40x40x4 mm
Width B min	250 mm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Specification	Value
Width B max	2500 mm
Height HR min	500 mm
Height HR max	2300 mm
Frame material	Aluminum, anodized
Grille material	Steel, hot-galvanized
Grille finish options	FA=0 hot-galvanized / FA=1 black RAL 9005 / FA=2 yellow RAL 1023
Support dimension	45x45 mm
Packaging unit	1
Weight	approx. 10 kg