

Antriebsstation AS 2/B-250, Spurbreite 160-1200 mm, ESD-geeignet - Bosch Rexroth 3842999721


Item no. BRR-3842999721

Manufacturer Bosch Rexroth

Fully assembled drive module for the TS 2plus transfer system, supporting section loads of up to 250 kg in accumulation operation. Covers track widths from 160 to 1200 mm, is ESD-suitable, and rated for dry-room environments below 1 % RH. Individual width variants can be ordered on request.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Weight	0.1 kg
Zolltarifnummer	84313900

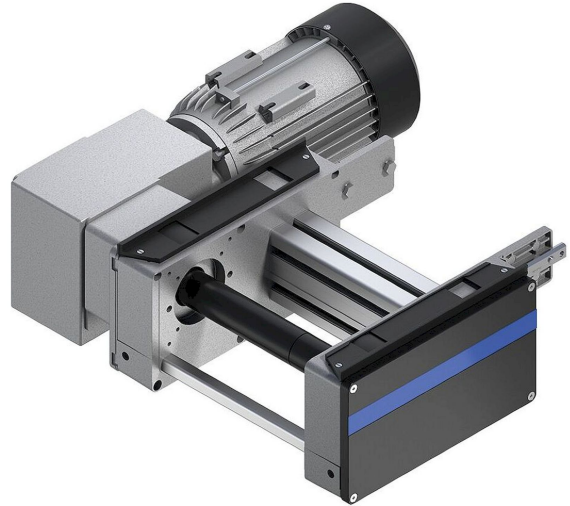

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Drive Module AS 2/B-250 powers belt and toothed-belt conveyor sections in the Bosch Rexroth TS 2plus transfer system. Supplied fully assembled, it handles section loads of up to 250 kg in accumulation operation across track widths from 160 to 1200 mm. Nine preferred widths are available from stock; further individual variants can be ordered.

- ESD-suitable for electrostatically sensitive production environments
- Dry-room rated below 1 % relative humidity
- Section load in accumulation operation: 250 kg
- Delivered fully assembled, including fastening material for ST 2/... conveyor sections and adjacent return units
- Nine preferred widths: 160, 240, 320, 400, 480, 640, 800, 1040, 1200 mm

TECHNICAL DATA

Parameter	Value
Track width min [b min]	160 mm
Track width max [b max]	1200 mm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Parameter	Value
Preferred widths	160, 240, 320, 400, 480, 640, 800, 1040, 1200 mm
Conveyor medium length [IAS]	660 mm
Section load in accumulation operation	250 kg
ESD suitability	Yes
Dry room	<1 %RH
Scope of delivery	Drive Module AS 2/B-250, incl. fastening material
Delivery condition	Fully assembled
Required accessories	Roller track RB 2 for adjacent longitudinal sections and workpiece pallet lengths < 320 mm; Roller track set RB 2/UM 2 for transverse sections