

Strebenprofil 30x60, Aluminium eloxiert, variable Länge 50-6070 mm - Bosch Rexroth 3842992457-1000


Item no. BRR-3842992457-1000

Manufacturer Bosch Rexroth

Rectangular strut profile 30x60 mm in anodized aluminum for the Rexroth modular assembly system with 30 mm grid. Six open slots (slot size 8 mm) allow connections on all faces using standard Rexroth fasteners. Supplied in variable lengths from 50 to 6070 mm, cut to size on order.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.0099 kg
Zolltarifnummer	76042100

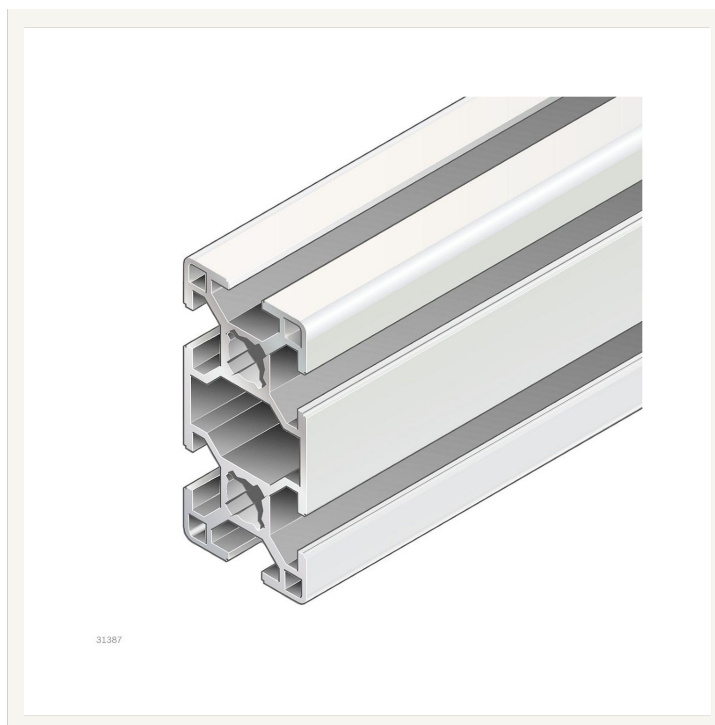

DESCRIPTION

The 30x60 strut profile is a rectangular aluminum extrusion for the Bosch Rexroth modular assembly system on a 30 mm grid. Six open slots (slot size 8 mm) provide full connectivity on all faces for brackets, connectors, and attachments. Variable supply lengths from 50 to 6070 mm allow precise cutting with no material waste.

- Six open slots for flexible connections on all profile faces
- Variable length 50-6070 mm - precise cut to size
- Anodized aluminum: corrosion-resistant, lightweight, durable
- Pre-machined cores: M8 in all core channels, D11 in slots B/F and C/E, D11V in slots A/D
- Compatible with the full Rexroth accessory range for the 30 mm grid

TECHNICAL DATA

Property	Value
Cross-section	30x60 mm
Modular dimension	30 mm
Profile slot	8 mm
Open slots	6
Profile type	Standard
Material	Aluminum, anodized

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Property	Value
Color	Natural
Length min (L min)	50 mm
Length max (L max)	6070 mm
Condition on delivery	Variable length
Profile surface (A)	5.5 cm ²
Mass (m)	1.5 kg/m
Area moment of inertia X (Ix)	19.6 cm ⁴
Moment of resistance X (Wx)	7.0 cm ³
Area moment of inertia Y (Iy)	5.1 cm ⁴
Moment of resistance Y (Wy)	3.9 cm ³
Torsional moment of inertia (It)	2.6 cm ⁴
Moment of torsion resistance (Wt)	2.1 cm ³
Profile machining	M8 in all core channels; D11 in slots B/F, C/E; D11V in slots A/D
Packaging unit	1 piece