

Strebenprofil 15x22,5 D17 - eloxiertes Aluminiumprofil, 1000 mm - Bosch Rexroth 3842992474-1000


Item no. BRR-3842992474-1000

Manufacturer Bosch Rexroth

Compact aluminum strut profile with a 15x22.5 mm cross-section and one open slot (10 mm slot width) for space-efficient framing and bracing in assembly and automation structures. Anodized aluminum in natural finish provides lasting corrosion resistance at a mass of 0.3 kg/m. Cut-to-length from 60 mm to 3000 mm; this unit is supplied at 1000 mm.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.0099 kg
Zolltarifnummer	76169990

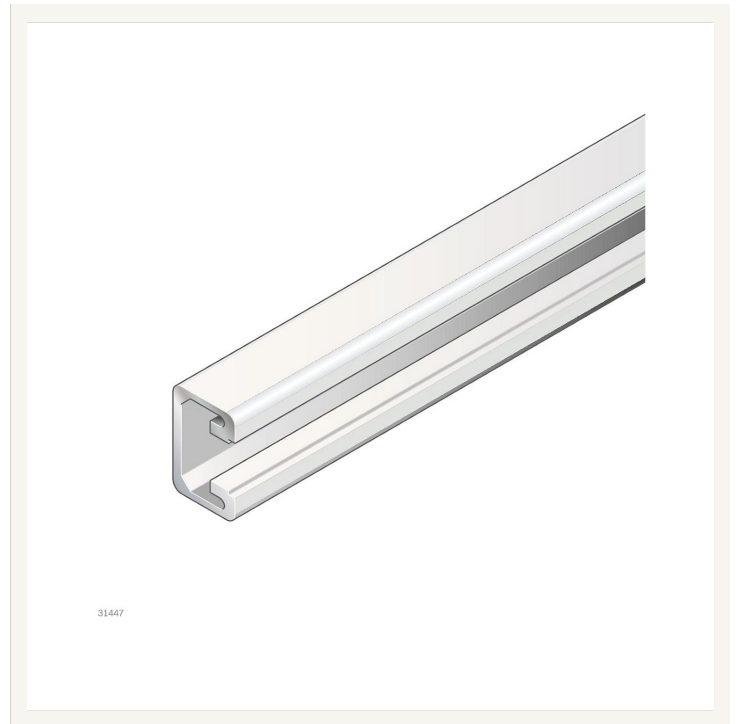

DESCRIPTION

The Strut Profile 15x22.5 D17 from Bosch Rexroth is an anodized aluminum profile in the 45 mm grid system, designed for compact connections and bracing in assembly lines, workstations, and automation equipment. Its 15x22.5 mm cross-section with a single 10 mm open slot provides a positive-locking fit wherever space is restricted but full system compatibility is required.

- Low mass: 0.3 kg/m with high dimensional stability through anodized aluminum
- Flexible lengths: available cut-to-length from 60 mm to 3000 mm
- System-compatible: 10 mm slot and 45 mm modular dimension match all standard connectors and fasteners in the Bosch Rexroth assembly technology range
- Recommended accessories: cover caps 15x22.5 in signal gray or black for clean profile ends

TECHNICAL DATA

Parameter	Value
Cross-section	15x22.5 mm
Modular dimension	45 mm
Profile slot width	10 mm
Open slots	1
Profile type	Standard
Material	Aluminum, anodized

boxic24.com

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Parameter	Value
Color	Natural
Length (this unit)	1000 mm
Min / max length	60 mm / 3000 mm
Mass	0.3 kg/m
Profile surface [A]	1.3 cm ²
Area moment of inertia I _x	0.8 cm ⁴
Area moment of inertia I _y	0.3 cm ⁴
Moment of resistance W _x	0.9 cm ³
Moment of resistance W _y	0.6 cm ³
Packaging unit	1 piece