

Strebenprofil 20x20 D8/D8V, Aluminium eloxiert, 1000 mm - Bosch Rexroth 3842993496-1000


Item no. BRR-3842993496-1000

Manufacturer Bosch Rexroth

Square aluminum strut profile, 20x20 mm cross-section, for building lightweight frames, guards and fixtures in the 20 mm modular grid. Four open slots (slot size 6) on all faces allow tool-free positioning of connectors and add-on parts. Anodized natural finish; cut-to-length from 50 to 3000 mm.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.0099 kg
Zolltarifnummer	76169990

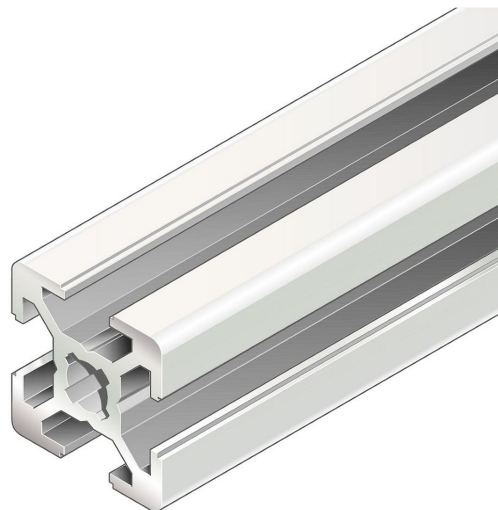

31366

DESCRIPTION

The Strut Profile 20x20 D8/D8V from Bosch Rexroth is a compact aluminum profile for lightweight support structures, safety guarding and workstation fixtures in the 20 mm modular grid. Four open slots (slot size 6) on every face let you position connectors and attachments without drilling - well suited to layouts that change frequently.

- Four open slots (size 6) on all outer faces for unrestricted connection points
- Anodized aluminum: corrosion-resistant, lightweight and dimensionally stable
- Cut to length: orderable from 50 mm to 3000 mm
- Compatible with the Bosch Rexroth assembly technology accessory system (cover caps, connectors, T-slot nuts)

TECHNICAL DATA

Parameter	Value
Cross-section	20x20 mm
Profile type	Standard
Profile slot	6
Open slots	4
Modular dimension	20 mm
Min. length (L min)	50 mm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Parameter	Value
Max. length (L max)	3000 mm
Article length (this order)	1000 mm
Material	Aluminum, anodized
Color	Natural
Profile surface (A)	1.6 cm ²
Mass (m)	0.4 kg/m
Area moment of inertia I _x	0.7 cm ⁴
Area moment of inertia I _y	0.7 cm ⁴
Moment of resistance W _x	0.7 cm ³
Moment of resistance W _y	0.7 cm ³
Torsional moment of inertia (I _t)	0.08 cm ⁴
Torsional moment of resistance (W _t)	0.17 cm ³
Packaging unit	1 piece
Recommended accessories	Cover cap 20x20 signal gray, Cover cap 20x20 black