

Strebenprofil 20x60, L=3000 mm, Aluminium eloxiert, 6 Nuten - Bosch Rexroth 3842523239

Item no. BRR-3842523239

Manufacturer Bosch Rexroth

Strut profile with a 20x60 mm cross-section and six open slots on a 20 mm modular grid for building flexible assembly structures. The anodized aluminum bar is supplied as a single rod at the standard length of 3000 mm. Recommended accessories: cover cap 20x60 in signal gray or black.

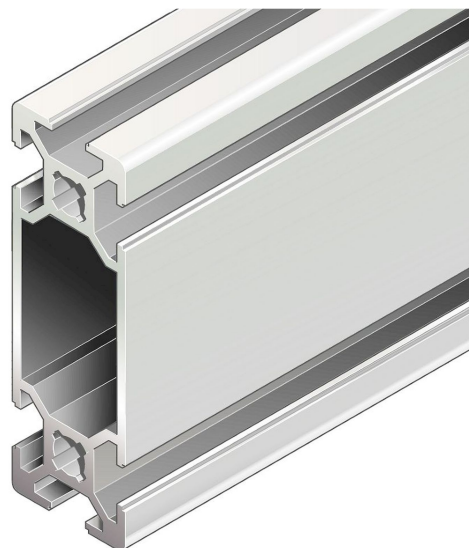
TECHNICAL DATA

Country of Manufacture **Germany**

Hinweis **Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.**

Length **3000 mm**

Weight **2.742 kg**

Zolltarifnummer **76042100**


31374

DESCRIPTION

The Bosch Rexroth 20x60 strut profile is an anodized aluminum section with six open slots on a 20 mm modular grid. It serves as a structural and bracing element in manual assembly workstations, protective guards, and machine enclosures within the Rexroth profile system. The unit is delivered as a single rod at the standard length of 3000 mm.

- Six open slots allow connections on all sides and flexible orientation within a structure
- Anodized aluminum surface provides lasting corrosion resistance without additional treatment
- 20 mm modular dimension ensures full compatibility with all 20 mm system components
- Profile cross-section area of 3.5 cm² at a low linear mass of 0.9 kg/m

TECHNICAL DATA

Property	Value
Cross-section	20x60 mm
Length [L]	3000 mm
Modular dimension	20 mm
Profile slot	6
Open slots	6
Profile type	Standard

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Property	Value
Material	Aluminum, anodized
Color	Natural
Profile surface [A]	3.5 cm ²
Mass [m]	0.9 kg/m
Weight (bar)	2.742 kg
Area moment of inertia [Ix]	14.2 cm ⁴
Area moment of inertia [Iy]	1.7 cm ⁴
Moment of resistance [Wx]	4.7 cm ³
Moment of resistance [Wy]	1.7 cm ³
Torsional moment of inertia [It]	2.3 cm ⁴
Moment of torsion resistance [Wt]	2.0 cm ³
Condition on delivery	Single rod in standard length
Packaging unit	1
Recommended accessories	Cover cap 20x60, signal gray; Cover cap 20x60, black