

Strebenprofil 10x40, 3000 mm, Aluminium eloxiert - Bosch Rexroth 3842526816

Item no. BRR-3842526816

Manufacturer Bosch Rexroth

Slim aluminum strut profile with a 10x40 mm cross-section, three open slots, and profile slot 6 for versatile integration into the Bosch Rexroth modular assembly system at a 20 mm pitch. Supplied as a single rod in standard length 3000 mm, natural anodized finish. Recommended accessories: cover cap 10x40 in signal gray or black.

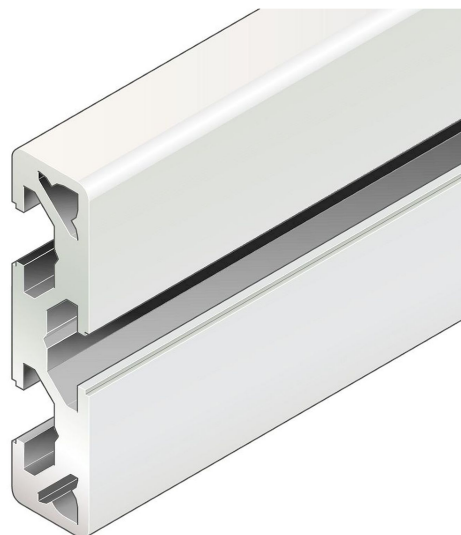
TECHNICAL DATA

Country of Manufacture **Germany**

Hinweis
Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.

Length **3000 mm**

Weight **1.767 kg**

Zolltarifnummer **76042100**


31365

DESCRIPTION

The Bosch Rexroth Strut Profile 10x40 is a lightweight aluminum standard profile for bracing and framing applications in industrial assembly systems. Its three open slots and profile slot 6 at a 20 mm modular pitch allow direct integration with the full range of Bosch Rexroth profile accessories and connectors.

- Three open slots enable fast connection of joining elements from multiple directions without repositioning
- Profile slot 6 - compatible with the complete Bosch Rexroth accessory program for this slot size
- Anodized aluminum construction: corrosion-resistant, dimensionally stable, and low weight
- Linear mass of 0.6 kg/m keeps assemblies light and easy to handle
- Delivered as a single rod, standard length 3000 mm - can be cut to length as required

TECHNICAL DATA

Parameter	Value
Cross-section	10x40 mm
Length [L]	3000 mm
Profile type	Standard
Profile slot	6
Open slots	3

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Parameter	Value
Modular dimension	20 mm
Material	Aluminum, anodized
Color	Natural
Profile surface [A]	2.1 cm ²
Area moment of inertia in x-direction [Ix]	3.2 cm ⁴
Area moment of inertia in y-direction [Iy]	0.2 cm ⁴
Moment of resistance in x-direction [Wx]	1.6 cm ³
Moment of resistance in y-direction [Wy]	0.4 cm ³
Mass [m]	0.6 kg/m
Weight (rod)	1.767 kg
Packaging unit	1 rod
Condition on delivery	Single rod in standard length
Recommended accessories	Cover cap 10x40, signal gray; Cover cap 10x40, black