

Strukturviskoses Schmieröl STRUCTOVIS GHD, 5-Liter- Kanne - Bosch Rexroth 3842562941


Item no. BRR-3842562941

Manufacturer Bosch Rexroth

Structural-viscosity gear oil approved by Bosch Rexroth for the LU 2/P central automatic lubrication unit in the TS 2plus transfer system. The 5-litre can covers routine refill needs in continuous production. Operating temperature range +5 to +60 °C.

TECHNICAL DATA

Country of Manufacture	Belgium
Weight	0.1 kg
Zolltarifnummer	27101999

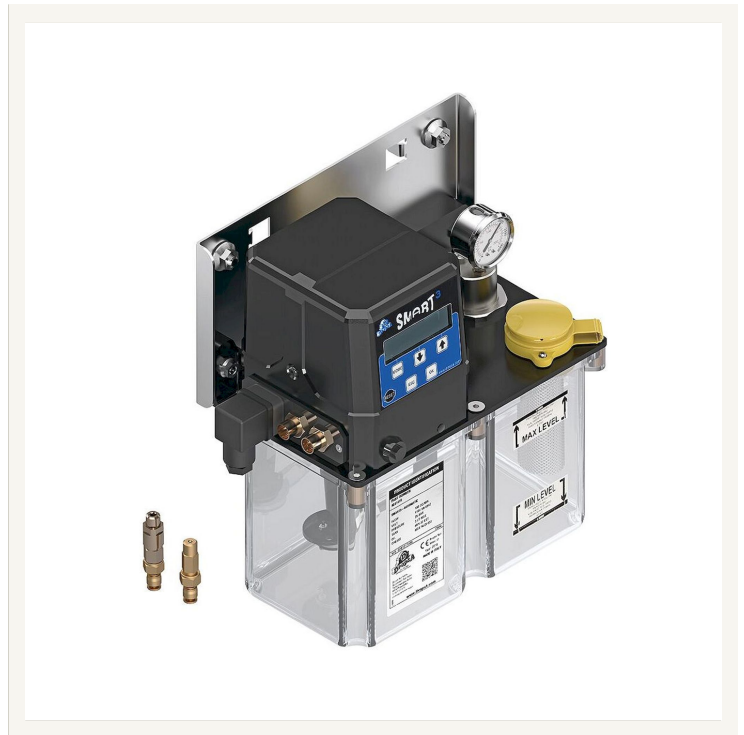

DESCRIPTION

STRUCTOVIS GHD is the Bosch Rexroth-approved lubricating oil for the LU 2/P central automatic lubrication unit of the TS 2plus transfer system. Its structural-viscosity formulation ensures consistent distribution to guides, deflection units, and drive components, protecting against premature wear.

- Approved for the LU 2/P lubrication unit in the TS 2plus
- Structural-viscosity formulation for reliable lubricant distribution
- Operating temperature +5 to +60 °C - suited to standard production environments
- 5-litre can for cost-effective stock management with regular refill cycles

TECHNICAL DATA

Property	Value
Oil designation	STRUCTOVIS GHD
Lubricant type	Structural-viscosity gear oil
Volume	5 l
Weight (filled)	4.6 kg
Operating temperature	+5 ... +60 °C
Packaging unit	1 can

Property**Value**

Application

Central automatic lubrication unit LU 2/P, TS 2plus transfer system
