

Strebenprofil 90x90L 4NVS, Nut 10, ESD, Aluminium eloxiert - Bosch Rexroth 3842538296

Item no. BRR-3842538296

Manufacturer Bosch Rexroth

Strut profile in anodized aluminum with a 90x90L cross-section, profile type 4NVS, featuring four slot 10 grooves and a 45 mm modular grid. ESD-capable for building dissipative frames, racks and fixtures. Supplied as a packaging unit of 6 profiles in the 6070 mm standard length.

TECHNICAL DATA

Country of Manufacture **Sweden**


Hinweis

Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.

Lenght **6070 mm**

Weight **255 kg**

Zolltarifnummer **76042100**

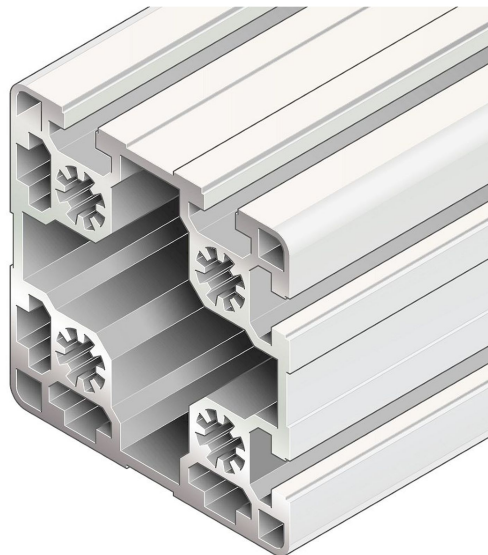

28954

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The 90x90L strut profile in profile type 4NVS is an ESD-capable (dissipative) extruded aluminum profile for building frames, racks and fixtures in assembly and automation technology. It offers four open slot 10 grooves on a 45 mm modular grid and connects flexibly through the slot 10 system.

- Four slot 10 grooves for versatile connection of fasteners and accessories
- ESD-capable for building electrostatically dissipative structures
- Anodized surface in natural color
- Supplied as a packaging unit of 6 profiles in the 6070 mm standard length

TECHNICAL DATA

Cross-section	90x90L 4NVS
Dimensions	90x90
Profile type	4NVS
Profile slot	10
Open slots	4

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Modular dimension	45 mm
ESD	yes
Length [L]	6070 mm
Delivery unit	6
Condition on delivery	Packaging unit in standard length
Color	Natural
Material	Aluminum, anodized
Mass [m]	6.5 kg
Profile surface [A]	24.2 cm ²
Area moment of inertia in x-direction [Ix]	220.9 cm ⁴
Area moment of inertia in y-direction [Iy]	220.9 cm ⁴
Moment of resistance in x-direction [Wx]	49.2 cm ³
Moment of resistance in y-direction [Wy]	49.2 cm ³
Torsional moment of inertia [It]	127 cm ⁴
Moment of torsion resistance [Wt]	22 cm ³
Recommended accessories	Cover cap 90x90L, black or signal gray
Weight (packaging unit)	255 kg