

Strebenprofil 30x30 1N, Aluminium eloxiert, Nut 8, 1 offene Nut - Bosch Rexroth 3842993704


Item no. BRR-3842993704

Manufacturer Bosch Rexroth

Square-section strut profile 30x30 mm, type 1N with one open slot (slot width 8 mm). Made from anodized aluminum, available in custom lengths from 50 to 6070 mm with standard and customized profile finishing options. Designed for light-duty frameworks and modular assembly structures.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.1 kg
Zolltarifnummer	76042100

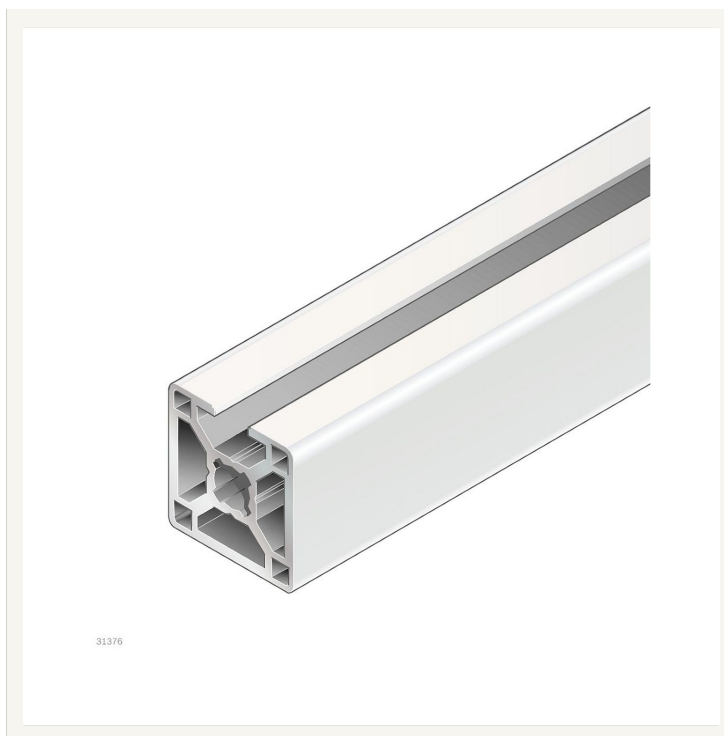

DESCRIPTION

The Strut Profile 30x30 1N is an aluminum system profile from the Bosch Rexroth modular assembly technology range. With one open slot (slot width 8 mm) and a modular dimension of 30 mm, it integrates directly into existing 30-series structures. Supplied in anodized finish, available in cut-to-length sizes from 50 mm to 6070 mm.

- Anodized aluminum surface for lasting corrosion resistance, ready to install
- Cross-section 30x30 mm, profile type 1N - one open slot for defined connection points
- Flexible length options: 50 mm to 6070 mm, packaging unit 1 piece
- Standard profile finishing: M8 / D7.8 / D11 / DB11 (observe minimum length requirements)
- Customized profile finishing: DI / DIS / MT / MTS / MI / MIS / DG (DGmax 45°, Lmin1/Lmin2 352/404 mm)

TECHNICAL DATA

Parameter	Value
Cross-section	30x30 mm
Profile type	1N
Open slots	1
Slot width	8 mm
Modular dimension	30 mm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Parameter	Value
Length min (L min)	50 mm
Length max (L max)	6070 mm
Profile surface (A)	3.7 cm ²
Area moment of inertia X (I _x)	3.1 cm ⁴
Area moment of inertia Y (I _y)	3.5 cm ⁴
Moment of resistance X (W _x)	2.0 cm ³
Moment of resistance Y (W _y)	2.3 cm ³
Torsional moment of inertia (I _t)	2.8 cm ⁴
Moment of torsion resistance (W _t)	1.5 cm ³
Mass	1 kg/m
Material	Aluminum, anodized
Color	Natural
Packaging unit	1 piece