

Umlenkblock für Gewichtsausgleich an Hubschranktüren, Profilnut 10 - Bosch Rexroth 3842555566

Item no. BRR-3842555566

Manufacturer Bosch Rexroth


Deflection pulley for counterbalanced lifting doors in Bosch Rexroth aluminum profile systems. Guides the control cable of a counterweight (square profile 35x35 mm) with individual weight adjustment and preferred cable-duct routing. Designed for safety-critical installations requiring a fall arrestor per Machinery Directive 2006/42/EC.

TECHNICAL DATA

Country of Manufacture Italy

Weight 0.576 kg

Zolltarifnummer 39174000

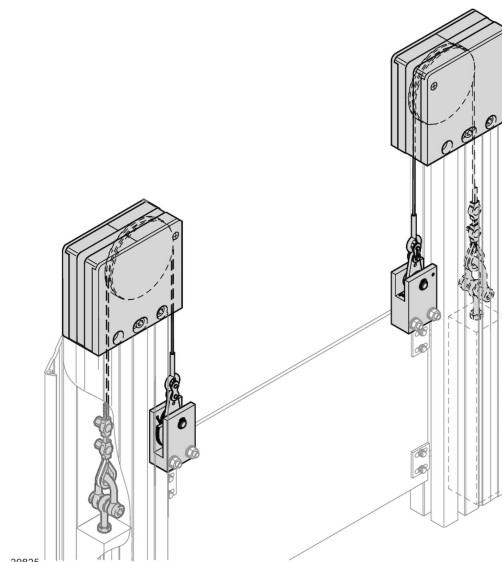

DESCRIPTION

The counterbalance deflection pulley redirects the control cable of lifting doors built with aluminum profile systems. The counterweight is individually adjustable and is preferably guided through a cable duct, keeping the installation clean and compact. The unit fastens to profile slot 10 via an M12 cylinder head screw; all fastening hardware in galvanized steel is included.

- Rated service life: 50,000 actuations
- Compatible with square-profile counterweights 35x35 mm (required accessory)
- Cable duct 45x45 recommended for tidy counterweight guidance
- Compliant with Machinery Directive 2006/42/EC - use with a back-up fall arrestor is mandatory
- Color: signal gray, profile slot 10

TECHNICAL DATA

Specification	Value
Profile slot	10
Color	Signal gray
Weight	0.576 kg
Packaging unit	1
Scope of delivery	Incl. fastening material

Specification	Value
Fastening material	Steel, galvanized
Fastening material (detail)	1x cylinder head screw DIN7984-M12x40, 1x washer DIN433-A8.4, 1x cylinder head screw DIN7984-M8x20, 1x T-nut 10 M8
Required accessories	Counterbalance weight, square profile 35x35 mm
Recommended accessories	Cable duct 45x45 (3842549896), Slider 3842564170, Safety catch 3842546519
Service life	50,000 actuations
Fastening	M12 for mounting the deflection pulley