

Basiseinheit Antrieb und Umlenkung 65 AL, VarioFlow plus - Bosch Rexroth 3842547712


Item no. BRR-3842547712

Manufacturer Bosch Rexroth

This base unit forms the drive and return station of the VarioFlow plus aluminum chain conveyor system in size 65. It ships fully assembled and includes the fastening material, with a powder-coated diecast aluminum housing. Operation requires a drive kit, an active or passive bridge and slide rails.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Weight	10.22 kg
Zolltarifnummer	84313900

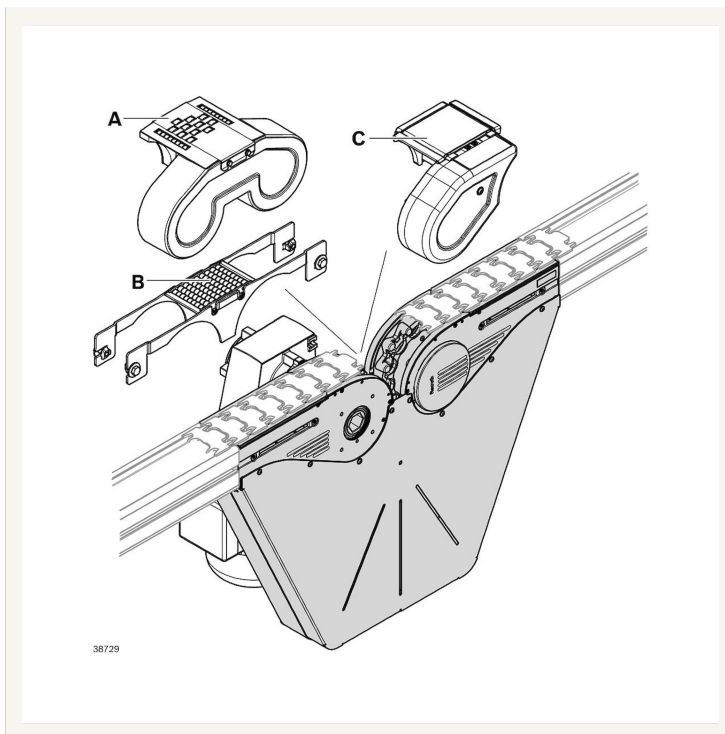

DESCRIPTION

The AL base unit forms the drive and return station of the VarioFlow plus chain conveyor system in aluminum design, size 65. It is supplied fully assembled and including the fastening material, and is intended for system integrators and maintenance teams in internal material flow.

- Housing in powder-coated diecast aluminum for high stability
- Factory-assembled, fastening material included
- Ball bearing in non-rusting steel 1.4301, FDA-compliant

TECHNICAL DATA

Attribute	Value
Size b	65 mm
Actual chain length	1.51 m
Effective sliding rail length	4x 0.2 m
Housing	Diecast aluminum, powder-coated
Chain wheel and chain guide	PA
Hexagonal shaft	up to size 160: PA; from size 160: non-rusting steel 1.4301 + PA
Connector	Steel, galvanized
Ball bearing	Non-rusting steel 1.4301/FDA

Attribute	Value
Scope of delivery	Incl. fastening material
Delivery condition	Fully assembled
Required accessories	Drive kit, active or passive bridge, slide rail (length calculation)
Weight	10.22 kg