

Bolzenverbinder 8/10 D11x30, Stahl verzinkt, ESD - Bosch Rexroth 384255590


Item no. BRR-384255590

Manufacturer Bosch Rexroth

Bolt connector for Bosch Rexroth aluminum profile systems with slot 8 and 10. Creates a conductive connection between two profiles, making it suitable for ESD-compliant workstation assemblies. Supplied in packs of 10 including 2 cover caps each; drilling jig 3842528577 required for installation.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Country of Manufacture	Germany
Length	30 mm
Weight	0.035 kg
Zolltarifnummer	83024900

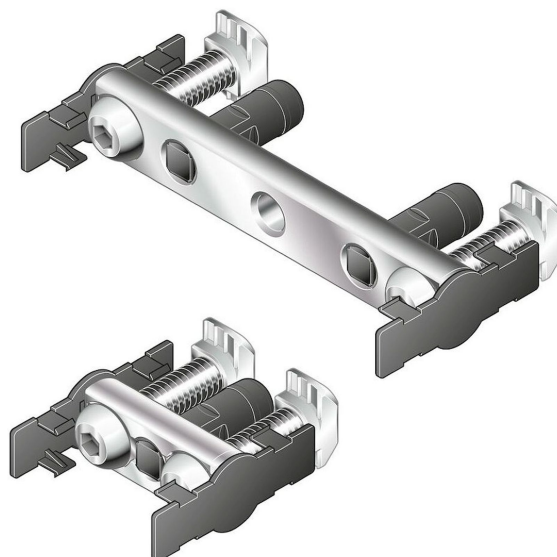

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The bolt connector 8/10 D11x30 joins two aluminum profiles with slot 8 or slot 10 in a positive-locking, continuously conductive connection - making it the right choice for ESD-protected workstations and fixtures built to current ESD standards. The galvanized steel bolt is inserted flush into a pre-drilled hole; the included PP cover caps close the opening cleanly.

- Conductive profile joint for ESD-compliant workstation systems
- Compatible with profile slot 8 and slot 10 (P1/P2: 8/10)
- Durable materials: bolt in galvanized steel; centering pin and cover caps in PP
- Compact design: length L 30 mm, installation length l2 18 mm, head diameter D 11 mm
- Packaging unit of 10, each including 2 cover caps

TECHNICAL DATA

Attribute	Value
Profile slot P1/P2	8 / 10
ESD	yes
Length [L]	30 mm

Attribute	Value
Installation length [l2]	18 mm
Head diameter [D]	11 mm
Material	Steel, galvanized
Material information	Bolt: steel, galvanized; centering pin, cover caps: PP
Color	Signal gray
Scope of delivery	10 pcs. incl. 2 cover caps each
Required accessories	Drilling jig 3842528577
Recommended accessories	Cover cap, ESD 3842551055
Weight	0.035 kg

Note: The bolt connector creates a conductive connection. The cover caps included in the set are not ESD-compatible; for fully ESD-compliant coverage, use the ESD cover cap (3842551055).