

Strebenprofil 15x22,5 D17, Aluminium eloxiert, 1 Nut, Länge 60-3000 mm - Bosch Rexroth 3842992474


Item no. BRR-3842992474

Manufacturer Bosch Rexroth

Compact aluminum strut profile with a 15x22.5 mm cross-section and one profile slot 10 for use in lightweight support structures, guards, and frames. Anodized natural finish, cut to length from 60 to 3000 mm. Grid dimension 45 mm, compatible with the Bosch Rexroth aluminum profile system.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.1 kg
Zolltarifnummer	76169990

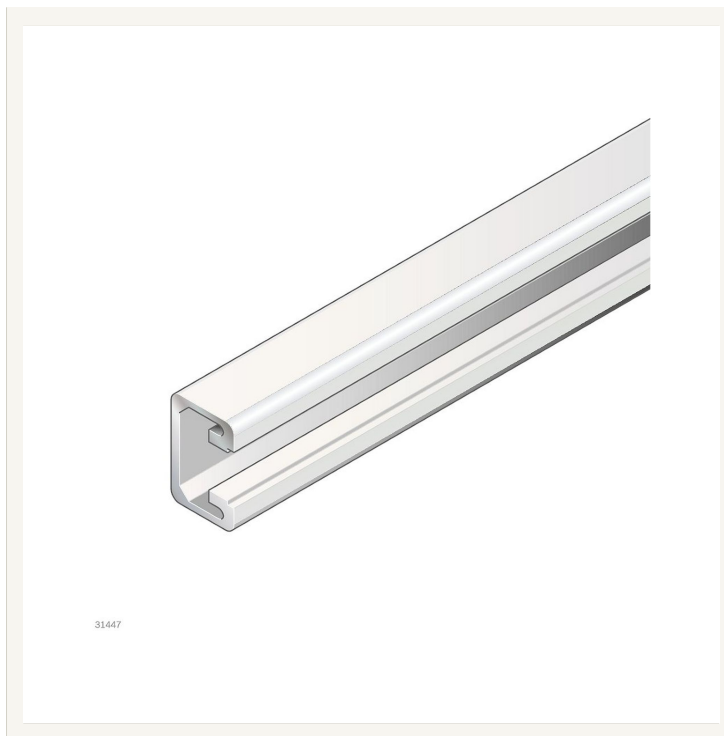

DESCRIPTION

The Bosch Rexroth Strut Profile 15x22.5 D17 is a slim standard aluminum profile designed for space-saving support structures, covers, and bracing within the modular assembly technology system. Its 15x22.5 mm cross-section and one open profile slot 10 integrate directly into existing Rexroth profile assemblies, supplied cut to the ordered length.

- Cut to length between 60 and 3000 mm - no further machining required
- Anodized aluminum surface: corrosion-resistant, lightweight, and clean in appearance
- One open profile slot 10 for connectors, T-slot nuts, and attachments
- Grid dimension 45 mm: compatible with the Bosch Rexroth 45-series profile system
- Low mass of 0.3 kg/m - suited to lightweight structures and panel frames

TECHNICAL DATA

Property	Value
Cross-section	15x22.5 mm
Profile slot	10
Open slots	1
Modular dimension	45 mm
Profile type	Standard

Property	Value
Material	Aluminum, anodized
Color	Natural
Length min. (L min)	60 mm
Length max. (L max)	3000 mm
Profile surface (A)	1.3 cm ²
Mass (m)	0.3 kg/m
Area moment of inertia X (I _x)	0.8 cm ⁴
Moment of resistance X (W _x)	0.9 cm ³
Area moment of inertia Y (I _y)	0.3 cm ⁴
Moment of resistance Y (W _y)	0.6 cm ³
Packaging unit	1
Recommended accessories	Cover cap 15x22.5 signal gray, Cover cap 15x22.5 black