

Nutenplatte 30x100 M, Nut 8 mm, L 100-5600 mm, Aluminium eloxiert - Bosch Rexroth 3842993336


Item no. BRR-3842993336

Manufacturer Bosch Rexroth

Center grooved plate 30x100 M for building grooved plate assemblies of any width in the Bosch Rexroth aluminum profile system. Seven 8 mm slots on a 25 mm grid, variable cut-to-length from 100 to 5,600 mm.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
Hinweis	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	0.0099 kg
Zolltarifnummer	76042990

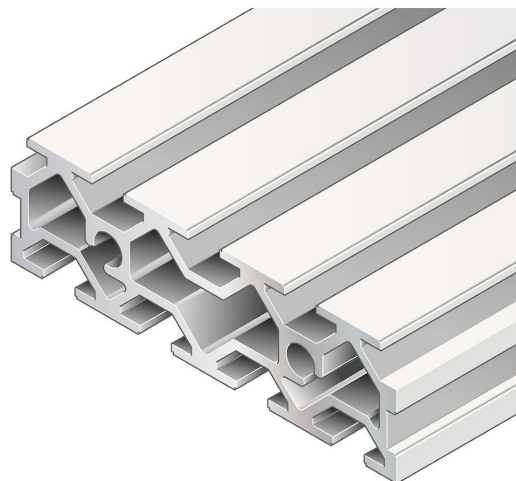

20251

DESCRIPTION

The grooved plate 30x100 M is the middle section used to build grooved plate assemblies of any width within the Bosch Rexroth modular aluminum profile system. It fits between the 30x100 L/R end plates and allows continuous width extension by adding further center sections.

- 7 open slots (slot size 8.9 mm, 8 mm slot connectors) on a 25 mm modular grid - compatible with all standard sliding blocks and 8 mm accessories
- 30x100 mm cross-section, anodized aluminum - corrosion-resistant and lightweight
- Variable cut-to-length from 100 to 5,600 mm - supplied as cut-to-length price, no excess waste
- Recommended: 3 sliding blocks (part no. 3842520922) per meter of profile length for joining plates

TECHNICAL DATA

Property	Value
Type	Grooved plate 30x100 M
Cross-section	30 x 100 mm
Profile slot	8 mm
Open slots	7
Modular dimension	25 mm

boxic24.com

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@boxic24.com

boxic24.com

Page 1/2

Property	Value
Length min.	100 mm
Length max.	5,600 mm
Delivery unit	1 piece (cut-to-length)
Mass	2.6 kg/m
Profile surface	9.7 cm ²
Moment of resistance Wy	6 cm ³
Area moment of inertia Iy	9.2 cm ⁴
Moment of resistance Wx	17.8 cm ³
Area moment of inertia Ix	88.8 cm ⁴
Material	Aluminum, anodized
Profile type	Standard